



Panel Backlight SCCT




Sobrepueta Embed

Cielo Suspendido Suspended Ceiling

Características / Characteristics

Luminaria de techo de sobreponer tipo panel, ideal para la iluminación de oficinas y ambientes corporativos. Con su novedosa tecnología SCCT es posible seleccionar en ella misma 3 temperaturas de color (4000K/5000K/6500K) y 3 potencias, ofreciendo en una sola luminaria 9 combinaciones diferentes. Sistema LED de larga duración (PCB LED), controlador electrónico UL, y con protección contra sobretensiones de 1KV. Puede ser instalada en cielo suspendido o colgante (accesorios no incluidos)

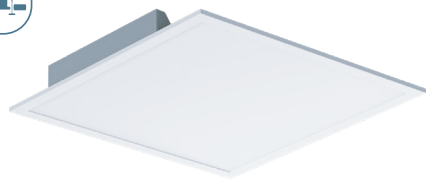

Panel type ceiling luminaire to embed. It is ideal to light up offices and corporate ambiances. With its innovative SCCT Technology, it is possible to select 3 different color temperatures (from 4000K to 6500K) and a wattage selectable 30W/ 40W/ 50W, offering a 9-in-one luminaire. Long-life LED system (LED PCB) coupled with UL electronic driver, with 1KV surge protection, to deliver optimal performance. Can be installed on suspended or pendant ceilings (accessories not included).




Información Técnica / Technical Information

Especificaciones / Specifications									
Código SKU	Descripción Description	Potencia Power (W)	TCC CCT (K)	Flujo Luminoso Luminous Flux (lm)	Tensión Voltage (V~)	Formato Format	IRC CRI	Factor de Potencia PF	Distorsión Armónica THD
90674923A	BACKLIGHT 1X4 SLM SCCT	3 en 1 20 30 40	4000 5000 6500	3 en 1 2000 3000 4000	120-277 VAC	1x4	> 80	> 0.9	< 20%
90674922A	BACKLIGHT 2X2 SLM SCCT	3 en 1 20 30 40	4000 5000 6500	3 en 1 2000 3000 4000		2x2			
90674924A	BACKLIGHT 2X4 SLM SCCT	3 en 1 30 40 50	4000 5000 6500	3 en 1 3000 4000 5000		2x4			

Dimensiones Generales / General Dimensions

Formato Format	L (mm)	W (mm)	H (mm)
1x4	1213	303	62
2x2	603	603	62
2x4	1213	603	62

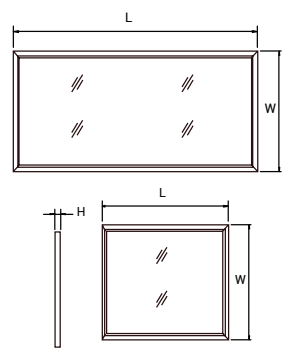

Fotometría / Photometry

